

WAGATE® SLUICE GATE


SPS-RTL SLUICE GATE

WaGate® sluice gates can be installed in individual chambers, pumping stations or treatment plants. A common area of use is as an emergency shut-off beside roads to prevent environmentally hazardous substances from contaminating water sources, pastures and arable land.

Missing ProductType Description en_gb

Materials

Fasteners mtrl.	EN 1.4404
Frame Mtrl.	EN 1.4404
Gasket Mtrl.	EPDM
Gate Mtrl.	EN 1.4404
Operating Rod mtrl.	EN 1.4404

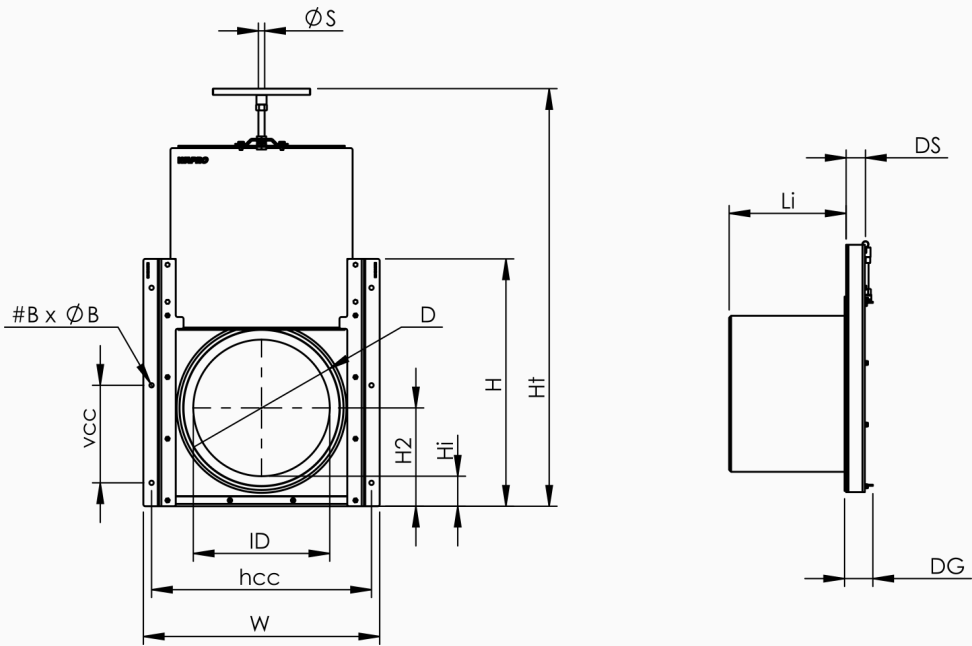

Product Data

Name	#B [-]	D [mm]	H [mm]	W [mm]	DG [mm]	DS [mm]	H2 [mm]	Hi [mm]	Ht [mm]	ID [mm]	Li [mm]	ϕB [mm]	ϕS [mm]	hcc [mm]	vcc [mm]	Weight [kg]	Max. On-Seating pressure [mH ₂ O]
SPS-RTL 200	4	200	420	406	62	48	152	60	674	184.6	175	9	12	364	152	8	4
SPS-RTL 250	4	250	550	456	62	48	177	115.4	700	230.8	200	9	12	414	177	10	4
SPS-RTL 315	4	315	550	521	62	48	210	64.6	700	290.8	250	11	12	479	210	12	4
SPS-RTL 400	6	400	680	606	62	48	252	67.3	1124	369.4	300	11	16	564	252	16	4
SPS-RTL 500	6	500	810	706	62	48	302	71.1	1010	461.8	375	13	16	664	301	21	2
SPS-RTL 630	8	630	940	836	62	48	367	136.1	1584	581.8	475	13	16	794	365	27	2