

WASTOP® INLINE CHECK VALVE


WaStop Flange

The WaStop Inline Check Valve immediately protects people and properties from flooding caused by backflow. WaStop also protects against odour and pests in the sewer and stormwater systems. WaStop is ingenious in its simplicity

WaStop with flange

Materials

Fasteners mtrl.	EN 1.4404
Valve Body mtrl.	EN 1.4301/EN 1.4404

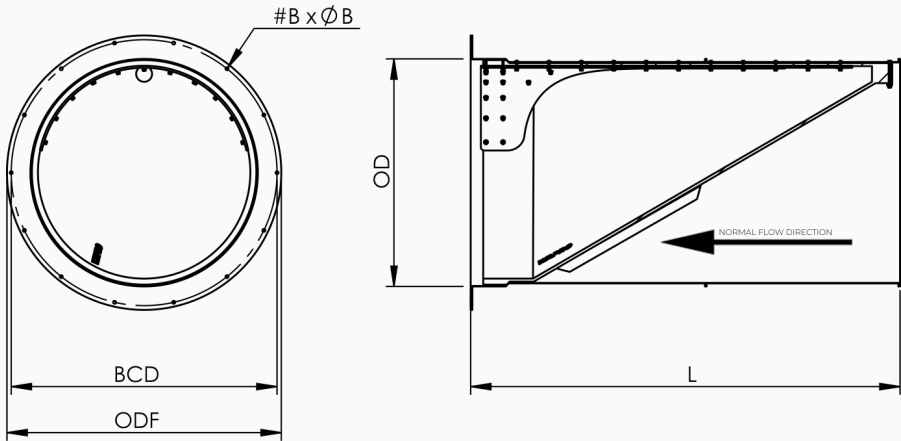

Product Data

Name	#B [-]	D [mm]	L [mm]	OD [mm]	ØB [mm]	BCD [mm]	Weight [kg]	Max. Flow Vel. [m/s]	Max. Flow Vol. [l/s]	Max. ID Host Pipe [mm]	Min. ID Host Pipe [mm]
WaStop 97 Flange	6	96	210	96	9	210	1.5	2	16	106	98
WaStop 116 Flange	8	115	235	116	9	225	1.8	2	26	126	117
WaStop 146 Flange	8	144.5	300	144.5	9	250	3	2	36	159	146
WaStop 183 Flange	8	181	385	181	9	300	5.2	2	64	200	182
WaStop 193 Flange	8	190.5	395	190.5	9	300	6.1	2	64	209	192
WaStop 215 Flange	8	215	450	215	9	325	6.4	2	80	233	216
WaStop 230 Flange	8	230	480	230	9	350	8.1	2	100	248	232
WaStop 240 Flange	8	240	495	240	9	350	8.9	2	100	258	242
WaStop 265 Flange	8	265	495	265	9	400	10	2	115	283	267
WaStop 283 Flange	8	283	600	303	10.5	400	11	2	125	301	285
WaStop 290 Flange	8	290	600	290	9	400	11	3	198	308	292
WaStop 340 Flange	12	340	700	340	9	460	18	3	290	360	344
WaStop 370 Flange	12	370	730	370	9	490	20	3	378	390	374
WaStop 390 Flange	12	390	750	390	9	510	22	3	378	411	393
WaStop 440 Flange	12	443	840	443	13	580	31	3	478	464	446
WaStop 490 Flange	12	490	900	490	13	630	37	4	786	511	493



Product Dimensions

Name	#B [-]	D [mm]	L [mm]	OD [mm]	ØB [mm]	BCD [mm]	Weight [kg]	Max. Flow Vel. [m/s]	Max. Flow Vol. [l/s]	Max. ID Host Pipe [mm]	Min. ID Host Pipe [mm]
WaStop 515 Flange	12	515	1000	515	14	630	25	4	833	536	518
WaStop 750 Flange	12	750	1400	750	13	880	92	4	1768	767	755
WaStop 790 Flange	6	790	1500	790	13	920	102	4	2012	807	795
WaStop 885 Flange	12	885	1700	885	13	1040	125	4	2546	912	890
WaStop 985 Flange	14	985	1800	985	17	1140	150	4	3142	990	1012
WaStop 1040 Flange	16	1040	2000	1040	17	1245	240	4	3464	1070	1048
WaStop 1185 Flange	14	1185	2250	1185	17	1380	390	5	5654	1230	1193
WaStop 1385 Flange	14	1385	2600	1385	17	1560	560	5	7698	1430	1393
WaStop 1485 Flange	14	1485	2800	1485	17	1710	580	5	8836	1530	1493
WS101-FL	6	100	215	100	9	210	1.5	2	20	111	101
WS1335-FL	14	1335	2520	1335	17	1560	560	5	7000	1380	1343
WS1980-FL	25	1980	3400	1980	21	2240	1310	5	12774	2040	1988
WS1785-FL	19	1785	3100	1785	19	2040	920	5	12774	1830	1793
WS1585-FL	18	1585	3000	1585	19	1840	700	5	10054	1630	1593
WS690-FL	12	687	1300	687	13	830	76	4	1540	710	692
WS590-FL	12	587	1140	587	13	720	54	4	1132	613	590