



WASTOP® INLINE CHECK VALVE


WaStop

The WaStop Inline Check Valve immediately protects people and properties from flooding caused by backflow. WaStop also protects against odour and pests in the sewer and stormwater systems. WaStop is ingenious in its simplicity

WaStop gasket and mounting tabs

Materials

Fasteners mtrl.	EN 1.4404
Gasket Mtrl.	EPDM
Valve Body mtrl.	EN 1.4301/EN 1.4404

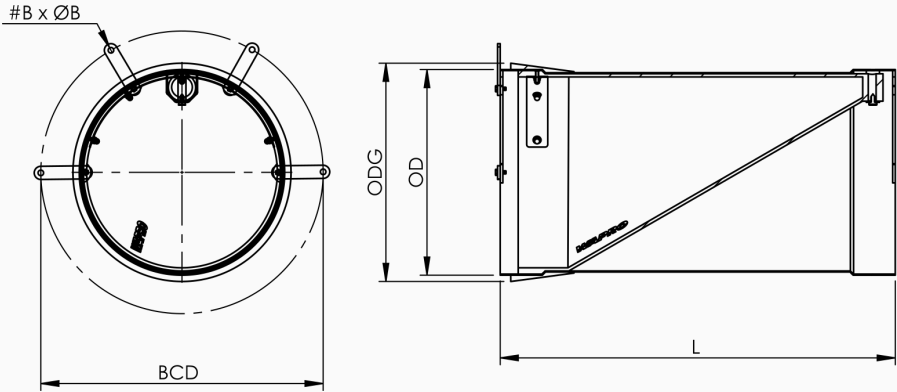

Product Data

Name	#B [-]	D [mm]	L [mm]	OD [mm]	ØB [mm]	BCD [mm]	ODG [mm]	Weight [kg]	Max. Flow Vel. [m/s]	Max. Flow Vol. [l/s]	Max. ID Host Pipe [mm]	Min. ID Host Pipe [mm]
WaStop 97	2	96	210	96	8.5	213	108	0.8	2	16	106	98
WaStop 101	2	100	215	100	8.5	217	112	0.9	2	20	111	101
WaStop 116	2	115	235	115	8.5	233	127	1.8	2	26	125	117
WaStop 146	2	144.5	300	144.5	8.5	261	160.5	2.6	2	36	159	146
WaStop 183	2	181	385	181	8.5	295	201	4	2	64	200	182
WaStop 193	2	190.5	395	190.5	8.5	318	210.5	4.3	2	64	209	192
WaStop 215	2	215	450	215	8.5	350	235	4.5	2	80	233	216
WaStop 230	2	230	480	230	8.5	364	250	6.7	2	100	248	232
WaStop 240	2	240	495	240	8.5	374	260	6.7	2	100	258	242
WaStop 265	2	265	550	265	10.5	438	285	9.4	2	115	283	267
WaStop 283	2	283	600	283	10.5	433	303	9.6	2	125	301	285



Product Dimensions

Name	#B [-]	D [mm]	L [mm]	OD [mm]	ØB [mm]	BCD [mm]	ODG [mm]	Weight [kg]	Max. Flow Vel. [m/s]	Max. Flow Vol. [l/s]	Max. ID Host Pipe [mm]	Min. ID Host Pipe [mm]
WaStop 290	2	290	600	290	10.5	442	314	10	3	198	308	292
WaStop 340	4	340	700	340	10.5	486	364	16.5	3	290	360	344
WaStop 370	4	370	730	370	10.5	516	394	19	3	378	390	374
WaStop 390	4	390	750	390	10.5	536	414	20.3	3	378	411	393
WaStop 440	4	443	840	443	10.5	585	467	25	3	478	464	446
WaStop 490	4	490	900	490	10.5	636	514	32	4	786	511	493
WaStop 515	4	515	1000	515	10.5	678	539	37	4	833	536	518
WaStop 590	6	587	1140	587	10.5	745	615	52	4	1132	613	590
WaStop 690	6	687	1300	687	10.5	825	715	73	4	1540	710	692
WaStop 750	6	750	1400	750	10.5	896	778	90	4	1768	767	755
WaStop 790	6	790	1500	790	10.5	928	810	94	4	2012	807	795
WaStop 885	6	885	1700	885	14	1229	915	116	4	2546	912	890